



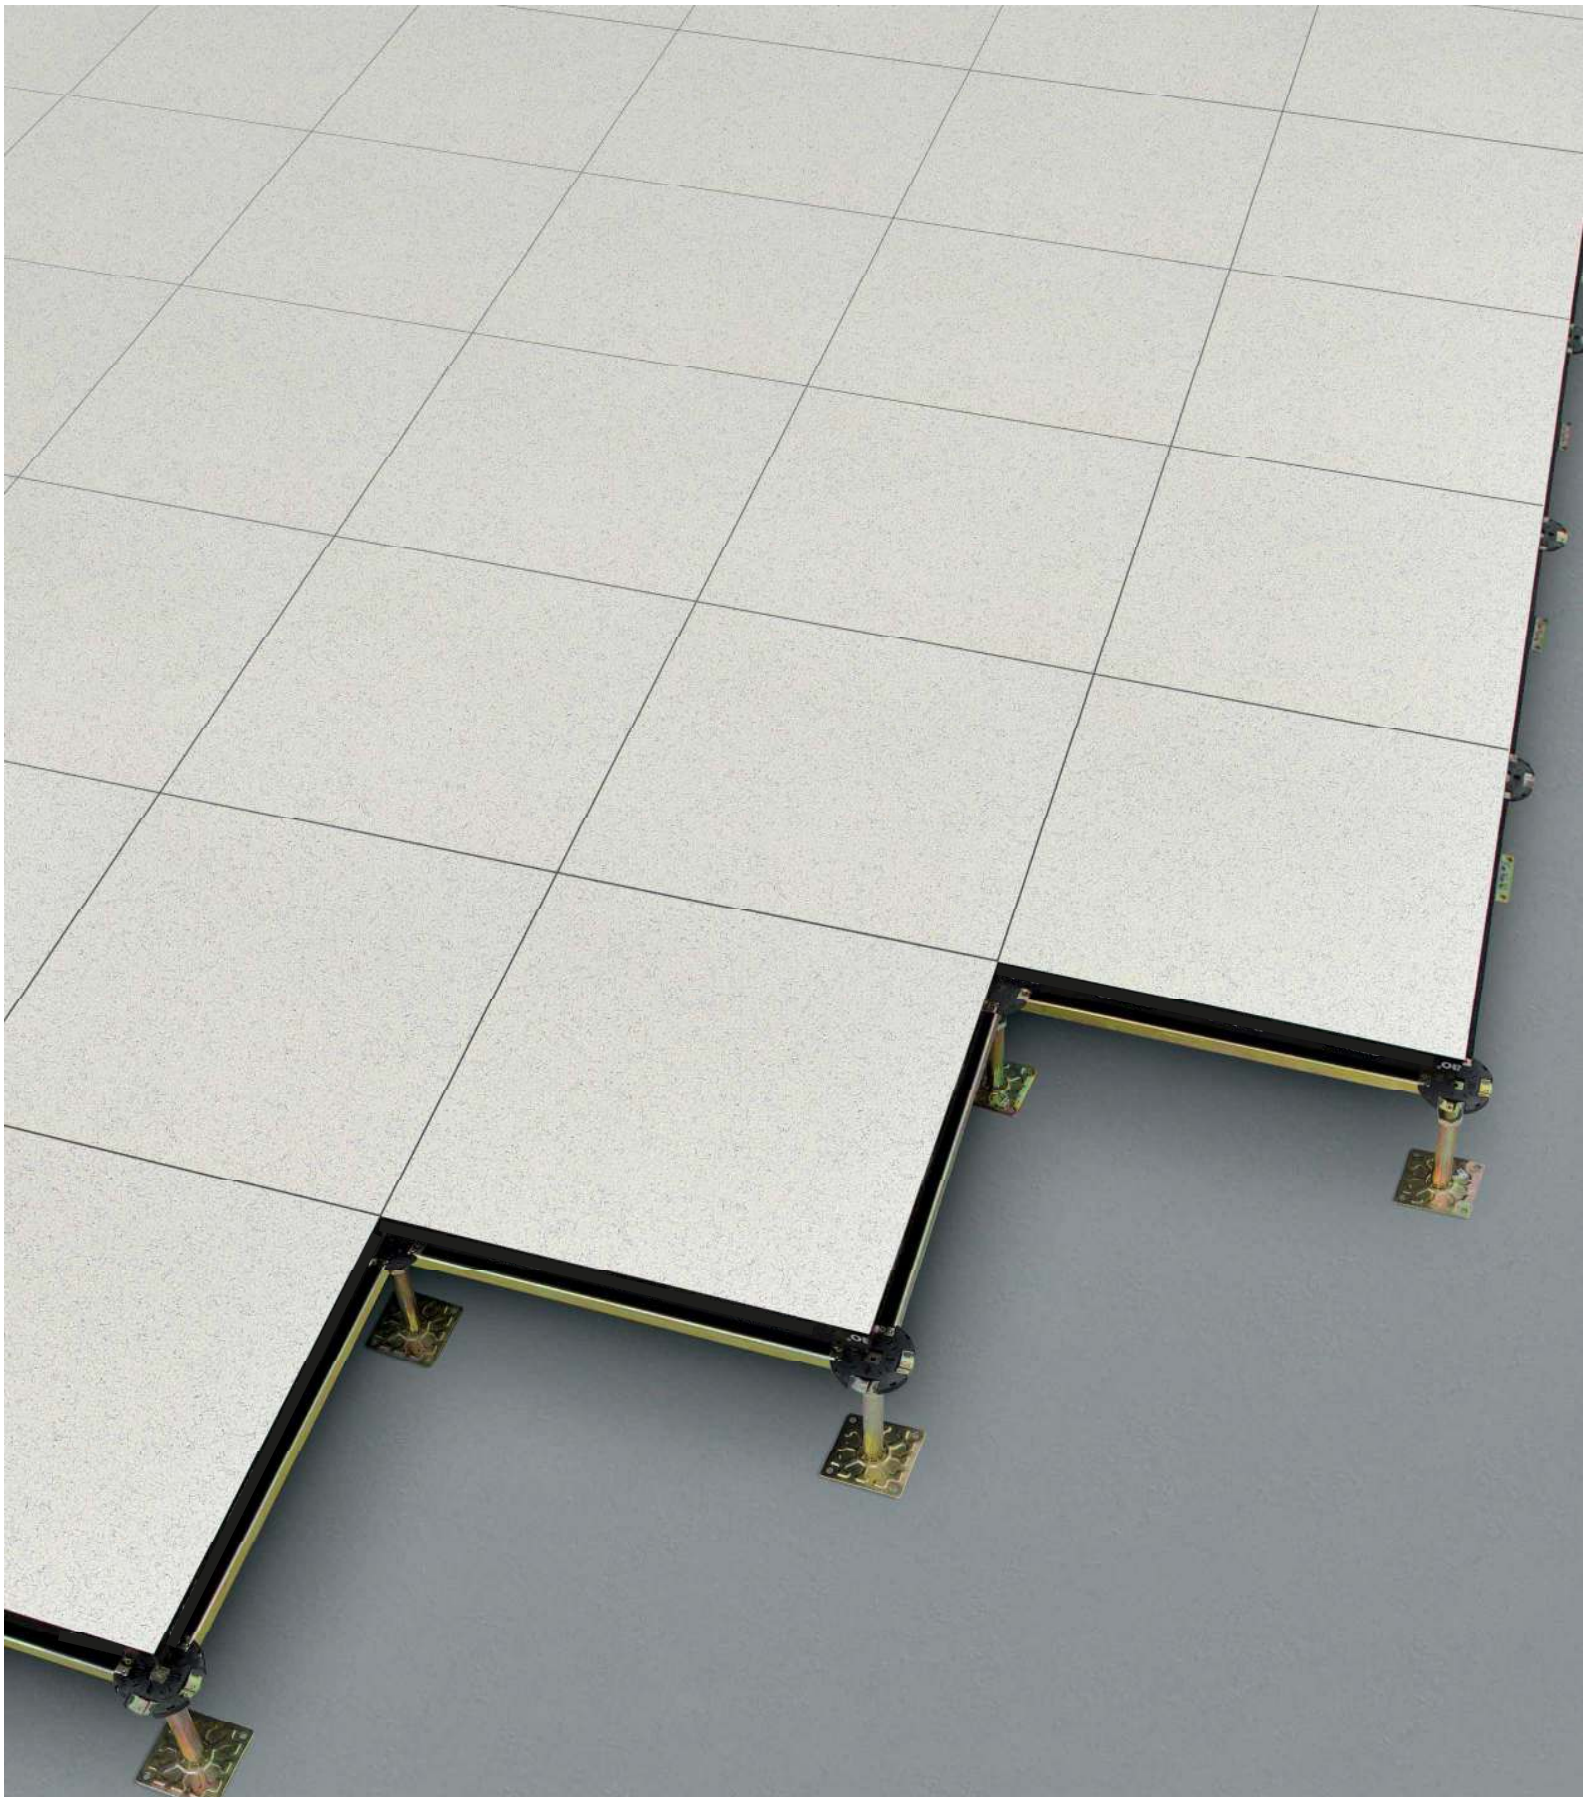

CTLINK RAISED ACCESS FLOOR SYSTEMS

CTLINK

ALUMINUM ACCESS FLOOR

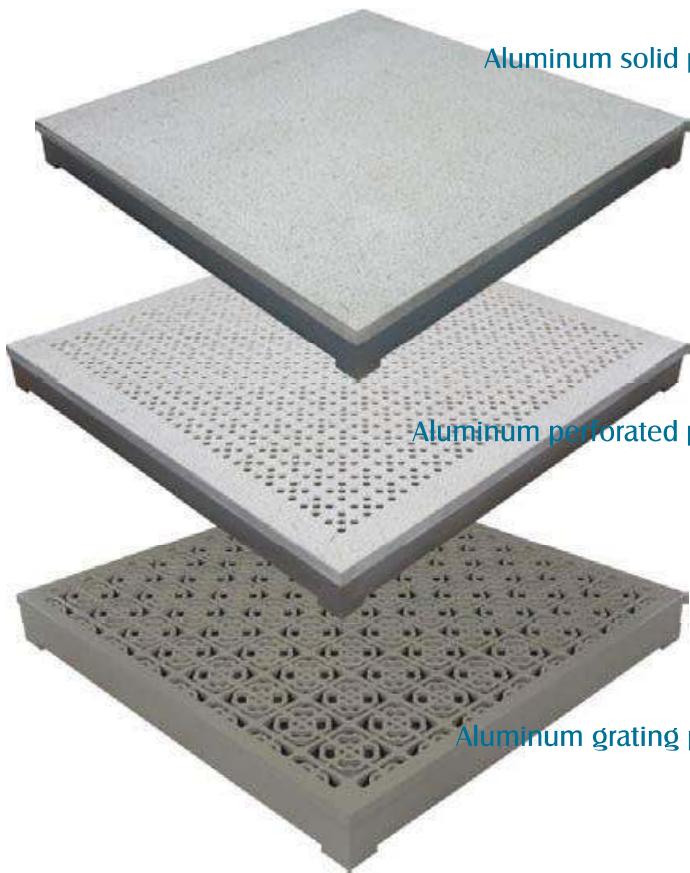

Aluminum solid panel

Aluminum perforated panel

Aluminum grating panel



Size

600×600×50mm

Feature

Aluminum access floor is die-casting with aluminum ingot which is light and anticorrosion. Aluminum access floor is widely used in the Aerospace Center, Military Command Headquarter, Data Center and Clean Room.

Type		Size	Concentrated	Impact Load	Ultimate Load	Uniform Load	Rolling Load	
International	Material	mm	N	N	N	N/M ²	10Passes	10000 Passes
A1000	ACD-12	600 × 600	≥4498	670	≥13494	≥23294	3596	2959
A1500	ACD-12	600 × 600	≥6693	670	≥20090	≥42581	5595	4498

UNDER STRUCTURE



Stringers

Stringers provide lateral resistance to heavy rolling loads & seismic loading.



Heavy pedestal




C01

C02

C03

C04

Cross head pedestal

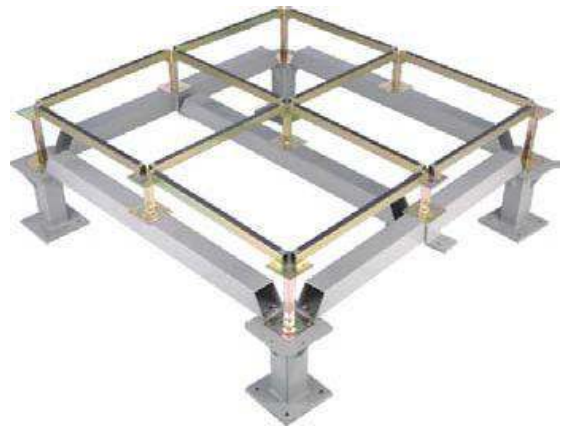

Seismic pedestal



F06

F01

F02

F05

Flat head pedestal



W03

W04

W07

W09

Round head pedestal



Ramp pedestal



Pedestal bracing

Finished flooring height (FFH) from 80mm to 2,000mm is available, with high loading strength.

CTLINK FLOOR
www.baohagroup.com.vn



Φ38

Φ32

Bracing kit

Covering Material

Variety of covering materials are available

A comprehensive selection of CTLINK covering materials are available including more colors of HPL, PVC and other interior finishes, to satisfy customer's different requirements. Please contact with us if you want other covering materials which is not listed below.

Ceramic tile

Homogeneous vinyl




2051



2060



2066

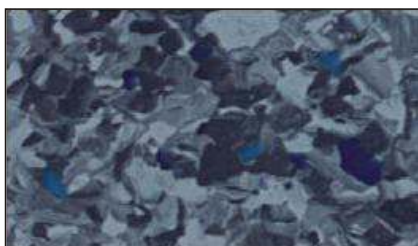

Covering Material



2073



2072



2050

Linoleum




3881



3882



3856

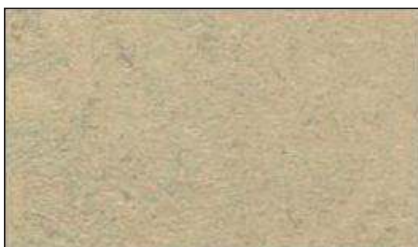

3858



3872



3876



3846





3825



3870

Granite

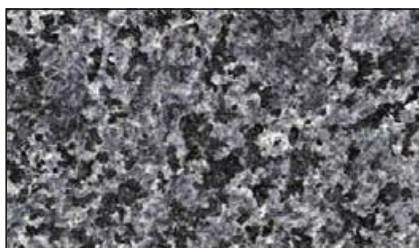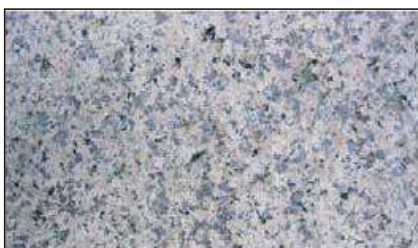


G655

HPL/Vinyl Finishes for Raised Access Floor Systems

Antistatic HPL

CTLINK Antistatic HPL
1.2/1.6 mm

Electrical resistance
 $1 \times 10^8 - 2 \times 10^{11}$ ohm

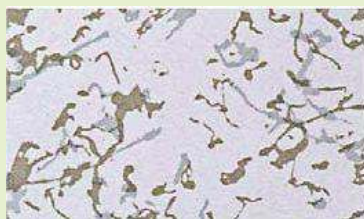

CT8192



CT8193



CT8194



CT8191



CT8132



CT8144



CT8137



CT8119



CT8117



CT8311



CT8345



CT8213

Vinyl

CTLINK Conductive
Vinyl 2.0/3.0 mm

Electrical resistance:
 $2.5 \times 10^4 - 1 \times 10^6$ ohm




VINYL 04




VINYL 05




VINYL 07




VINYL 08



VINYL 09



VINYL 10



VINYL 11



VINYL 13

CTLINK
Bao Ha Group

Hanoi Office:

No. 11, 67/5 Lane, Nguyen Van Cu Str.,
Ngoc Lam Ward, Long Bien Dist.,
Hanoi, Vietnam
Tel/Fax: 844 36274706
Hotline: 84 902288843
Email: contact@baohagroup.com
Website: <http://www.baohagroup.com.vn>

HCM Office:

No. 5/7, Nguyen Sieu Str.,
Ben Nghe Ward, District 1,
Ho Chi Minh, Vietnam
Tel/Fax: 848 36274706
Hotline: 84 902299953
Email: contact@baohagroup.com
Website: <http://www.baohagroup.com.vn>



CTLINK FLOOR presents and extensive choices for accessories, including electrical boxes, grommets, panel lifters and air diffuser and so on



Round brush grommet



Surface brush grommet



Split integral grommet



Round grommet



Square grommet



Integral grommet



Panel lifter



Outlet box B



Outlet box C

CTLINK
Bao Ha Group

Hanoi Office:
No. 11, 67/5 Lane, Nguyen Van Cu Str.,
Ngoc Lam Ward, Long Bien Dist.,
Hanoi, Vietnam
Tel/Fax: 844 36274706
Hotline: 84 902288843
Email: contact@baohagroup.com
Website: <http://www.baohagroup.com.vn>

HCM Office:
No. 5/7, Nguyen Sieu Str.,
Ben Nghe Ward, District 1,
Ho Chi Minh, Vietnam
Tel/Fax: 848 36274706
Hotline: 84 902288875
Email: contact@baohagroup.com
Website: <http://www.baohagroup.com.vn>